




DJCONTROL IMPULSE T7
3 Innofader Upgrade

INSTALLATION

1 PDF versions:

EN

2 Contents

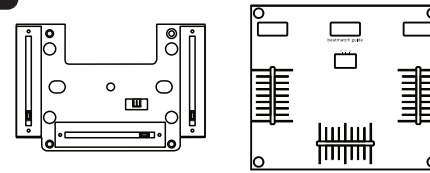


You need a Philips
cross screwdriver




3 Unplug T7 power
and USB cables.


Remove volume &
crossfader caps





4 Remove 4 torx 
screws, with the
torx key




5 Remove metal
plate




6 Remove Philips 
(cross) screws




7 Remove plastic
plate over faders

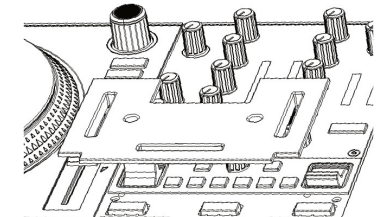


8 Remove the faders
power cable

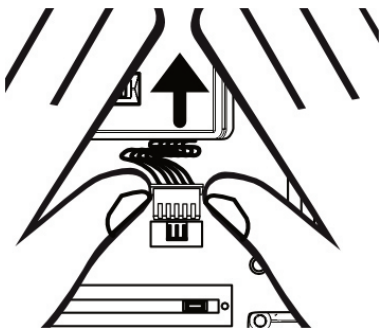


9 Remove 4 screws
from fader board

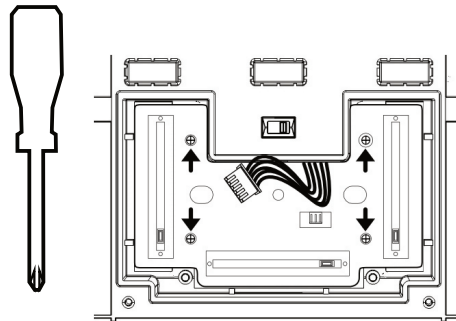


10 Remove standard
fader circuit board

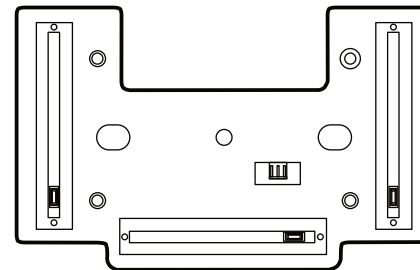


11 Take 3 Innofader
Upgrade (red) board

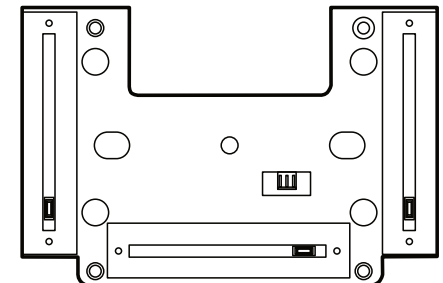


12 Place 3 Innofader Upgrade module in T7

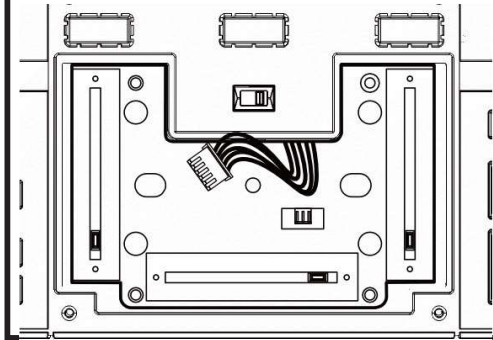


13 Insert power cable

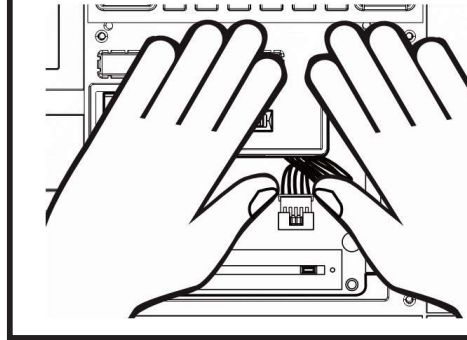


14 Add 4 philips (cross) screws

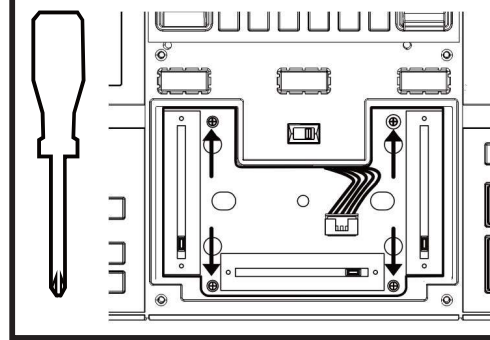


15 Place the cover (15,16 optional if using clear plate)

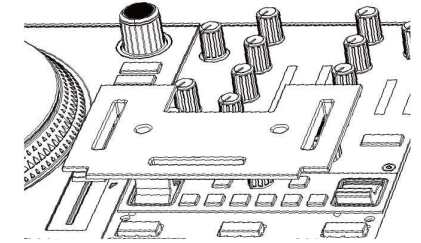

16 Add 2 philips (cross) screws

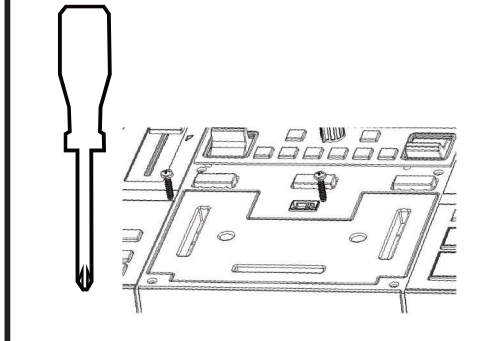

17 Fix plate with 4 torx screws

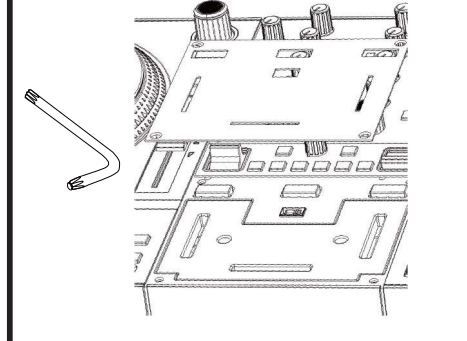

18 Before calibrating (19-23 optional)

Make sure DJControl Inpulse T7 firmware version is at least 1.87 / Top 1.24

Info in Hercules drivers Control panel > About.

19 Calibrate faders.

Connect T7 power and USB cables.
Press down deck 2 **Back** and **Range** keys while you switch on T7 power.
Release Back & Range keys.

20 Beatmatch guide key blinks

2 FX keys light on: 1 & 2.

Move both volume faders on top.
Move crossfader on middle position.

21 Press Beatmatch guide key once.

2 more FX keys light on: 3 & second 1.

Move the 2 volume faders to min & max position 2 times.
Move crossfader fully to left + fully to right.

22 Press Beatmatch guide key once again.

All FX keys are lit.

The calibration is finished.

23 Info / tutorial on fader calibration

<https://www.youtube.com/playlist?list=PLvBPF5gwVxRNgpMOrso2nIZ4KXd2J9p1u>

